



APPENDIX 6 – ILLUSTRATION OF DIMENSIONAL REGULATIONS

Section IV.g.3.(c) Irregularly-Shaped Lots

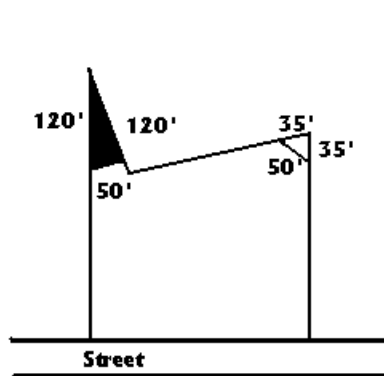

Where Minimum Lot Area requirement is less than 20,000 s.f., shaded area would be excluded from computation of Minimum lot area, as $120' + 120'$ is more than 150'.

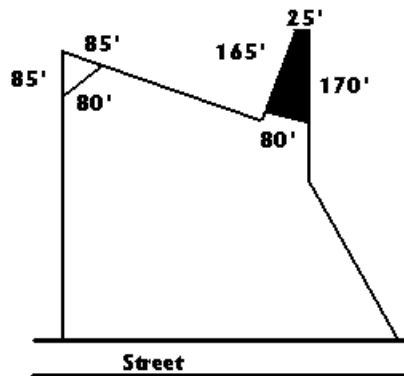

Where Minimum Lot Area requirement is 20,000 s.f. or more, shaded area would be excluded from computation of Minimum Lot Area, as $165' + 25' + 170'$ is more than 240'.

Section IV.G.4.(a) Lot Frontage Requirement


Minimum Lot Frontage as specified in Section IV.G.2. required at the frontage line

and


Section IV.G.4.(b) Lot Width Requirement

**Lot width not less than 80% of required Minimum Lot Frontage
from frontage through any point of building
and**

**Minimum lot width shall be equal to the Minimum Lot Frontage requirement
from the lot frontage to the front setback line
and again where any line passes through a principal building on a lot.**

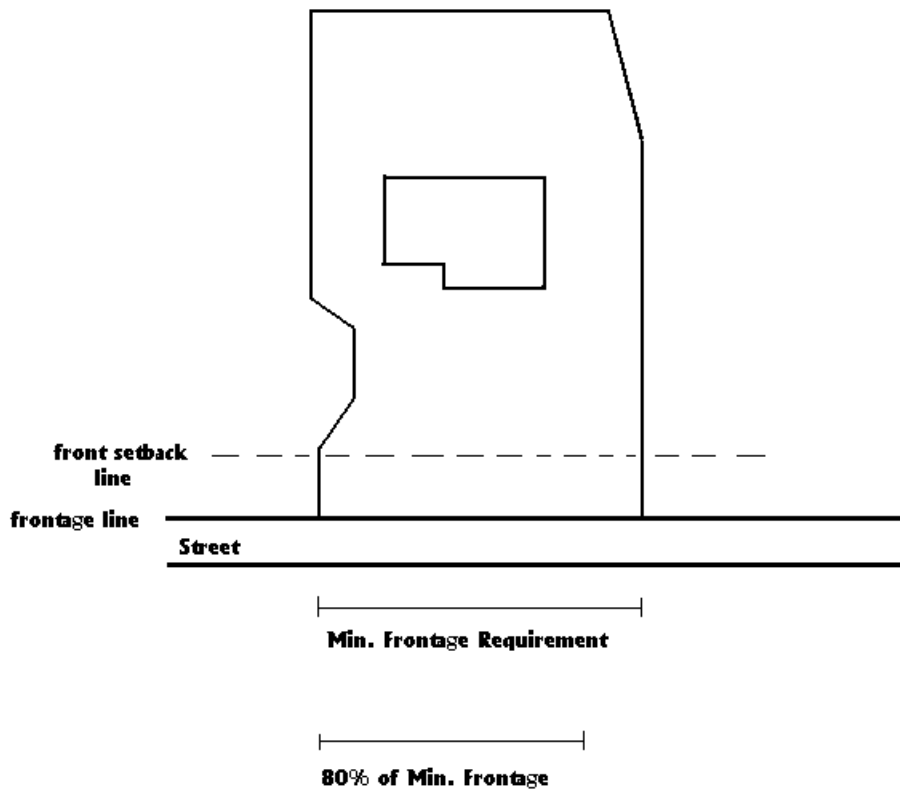

Section IV.G.5.(a)
Front and Side Setbacks

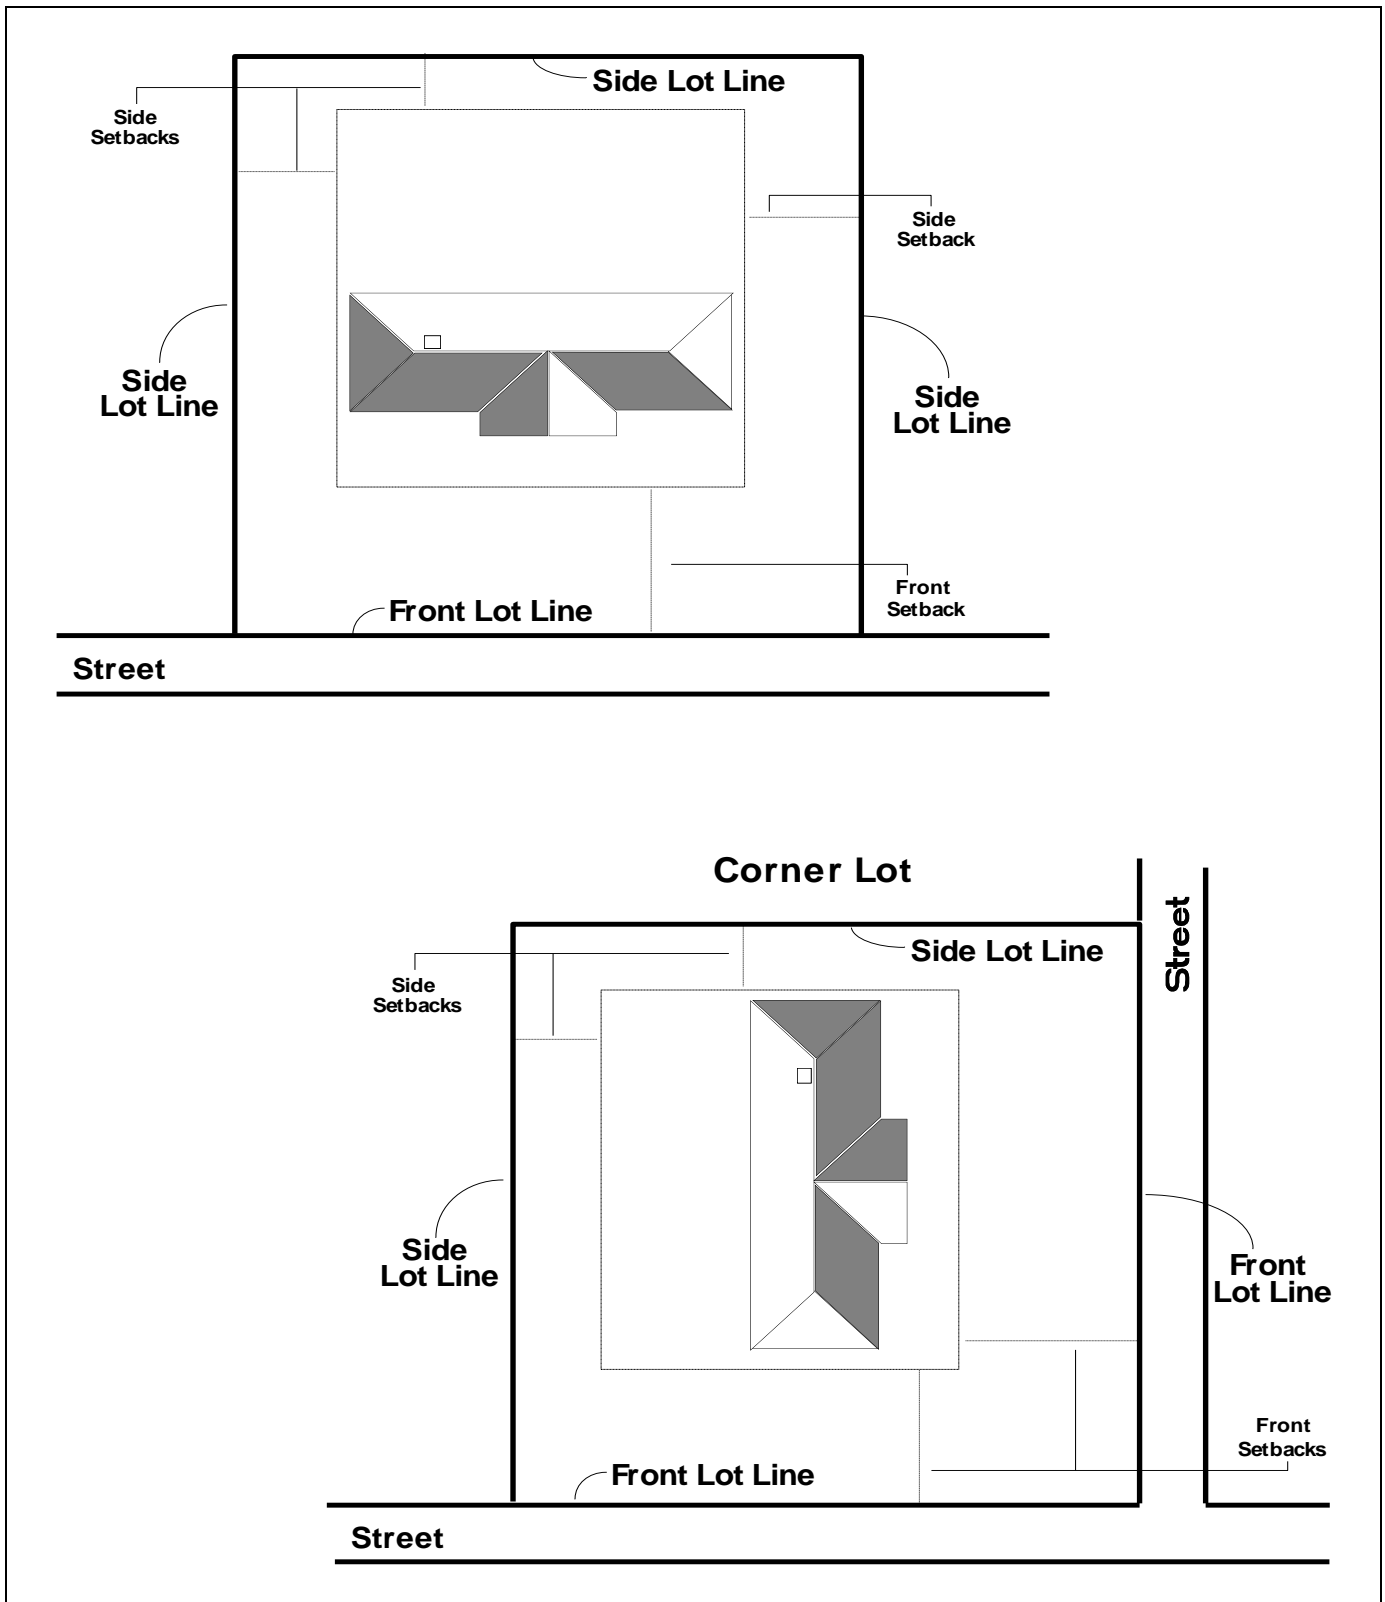

Section IV.G.5.(c)
Corner Clearance

